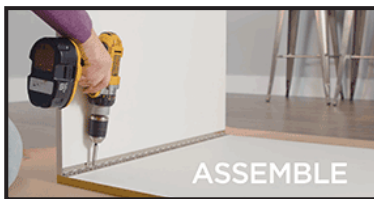# KILZ®

MURPHY TABLE HOW-TO:

SUPPLY LIST

- ☐ Plywood
- ☐ KILZ® Complete Coat™ Paint and Primer in One
- ☐ 100-150 Grit Sandpaper
- ☐ Dust Mask
- ☐ Damp Cloth
- ☐ Paint Brush
- ☐ 3/8" – 1/2" Synthetic Roller
- ☐ Drill or Screwdriver

- ☐ Screws
- ☐ Piano Hinge
- ☐ Hook and Eye Latch
- ☐ Stir Stick
- ☐ Can Key
- ☐ Framed Artwork
- ☐ Measuring Tape
- ☐ Level

PRO TIP:
For best results, apply with smooth strokes that go in the same direction as the wood grain.

PRO TIP:
Use a power drill to attach the piano hinge.

PRO TIP:
Use a stud finder to ensure the table is properly secured to wall.

RESULT

1 Start by cutting 2 pieces of ½" plywood to size 28¼" X 36". Then cut 2 additional pieces of plywood to 1" X 28¼" for the wall cleats.

2 Sand all pieces of plywood with 100-150 grit sandpaper.

3 After sanding, use a damp cloth to remove any dust from the pieces of plywood.

4 Open a can of KILZ Complete Coat Paint and Primer in One and thoroughly stir the paint.

5 Paint all of the pieces of wood with your selected colors and allow to dry.

6 Allow 2 hours dry time*, apply second coat if needed.

7 Next measure and cut the 2 piano hinges to size 28¼".

8 Using screws, attach the first piano hinge to connect the two larger pieces of plywood (table top and leg). Then attach the second piano hinge to connect the table top to the first cleat.

9 Measure and center the picture frame onto the front of the table leg. Once centered attach the frame with screws.

10 Attach the table top and lower cleat to the wall.

11 With the table folded against the wall, measure and attach the top cleat to the wall.

12 Finish by measuring and attaching the hook and eye latch to the top wall cleat and the table leg.

*Dark colors and high humidity areas may have extended dry times.